

#### INTRODUCTION

A Standard Range of open bottom units for supporting and lifting loads from any depth. Their advanced design and careful construction ensures a safe and robust product which is universally accepted by marine contractors and salvors around the world. While good for vessel draft reduction and often used for lightening underwater structures, their main application is for lifting vessels and other loads from the seabed to the surface.

#### FEATURES

- High tensile Polyester 3x3 Panama basecloth.
- Webbing strops terminate at single lifting ring.
- Unique 'de-tangler' for zero vis. rigging.
- Heavy duty UV stabilised PVC coating.
- RF welded seams for strength.
- Handling ladders.
- 3/4" Inflation Valve.
- Delivered ready for use.
- Log Book, Certification and Instructions.


With over 15 years experience gained from designing, building, hiring and maintaining the world's largest stock of certified air lift bags, Seaflex offer the Standard Range of ALBs as the most tried and tested units available today.

#### COMPLIANCE & CERTIFICATION

- Seaflex ALBs comply with the accepted European offshore standard IMCA DO/16 - Air Lift Bags.
- Seaflex in-house manufacturing procedures comply with BS EN ISO9001-2000. Independently assessed and certified by Lloyds Register Quality Assurance Ltd.

#### STANDARD RANGE:

Model No.	Inflated (kgs & mtrs)				Packed (kgs & mtrs)			
	Lift	H	Ø	Wt	L	W	D	No/ pallet
250 ALB	250	1.3	0.9	3	0.4	0.2	0.1	40
500 ALB	500	1.7	1.2	5	0.5	0.3	0.2	30
1t ALB	1,000	1.9	1.6	11	0.6	0.4	0.2	20
2t ALB	2,000	2.5	1.8	23	0.8	0.4	0.3	10
3t ALB	3,000	3.2	2.0	32	0.8	0.4	0.3	6
5t ALB	5,000	3.7	2.0	38	0.9	0.5	0.3	5
10t ALB	10,000	4.5	2.4	68	1.2	0.5	0.4	4
20t ALB	20,000	5.5	3.2	150	1.2	0.7	0.5	2
35t ALB	35,000	6.5	4.0	230	1.4	1.2	1.3	1

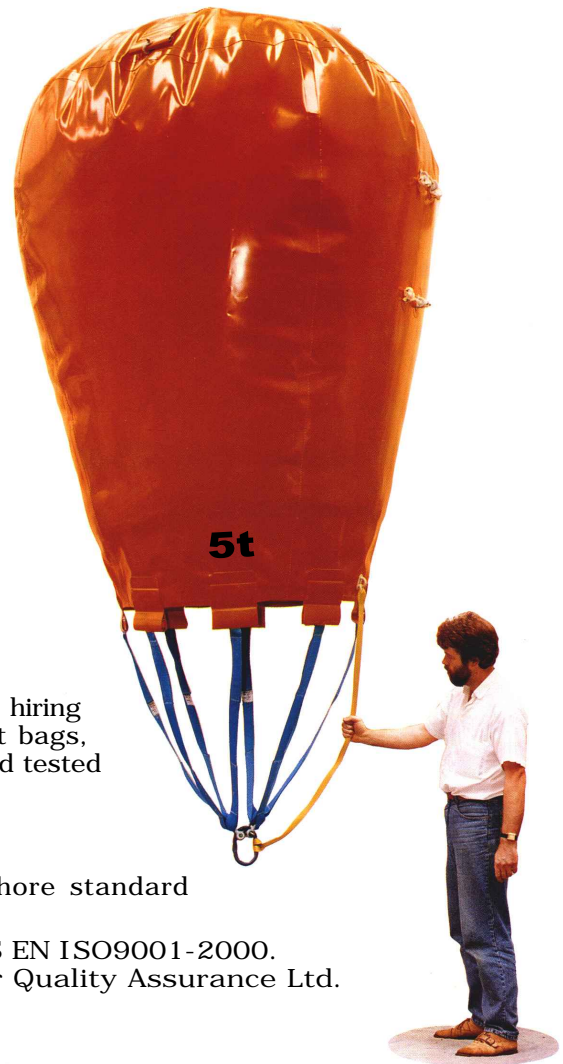

Technical Information Sheets on Seaflex products and their use are available by mail, fax or email.

For specific information, prices or a quotation please contact

Mark Board - [mlb@seaflex.co.uk](mailto:mlb@seaflex.co.uk) OR Graham Brading - [gsb@seaflex.co.uk](mailto:gsb@seaflex.co.uk)